Adjustable Frame

INSTRUCTION SHEET

11/02/2011

1

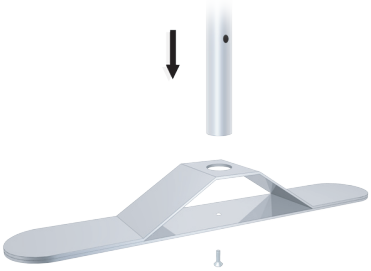

Screw the three-section telescoping poles onto bases.

Note: Vertical poles are already connected and have a plastic cap on top.

2

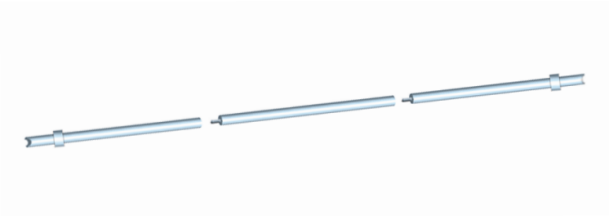

Assemble horizontal poles by attaching male to female ends. Once assembled, the notches should be at each end.

3



Slide graphics over top and bottom crossbar

4



Secure top and bottom crossbars to vertacle poles using knobs provided. Raise verticle telescopic poles until the graphic is taut, then twist the cam to lock.